New

Grease trap family 50

Pre-treatment solutions

September 2017




Grease trap in polyethylene for pre-treatment of kitchens wastewater

Civil waste water

Possible destination

Electrical connection not required

Technical features and advantages

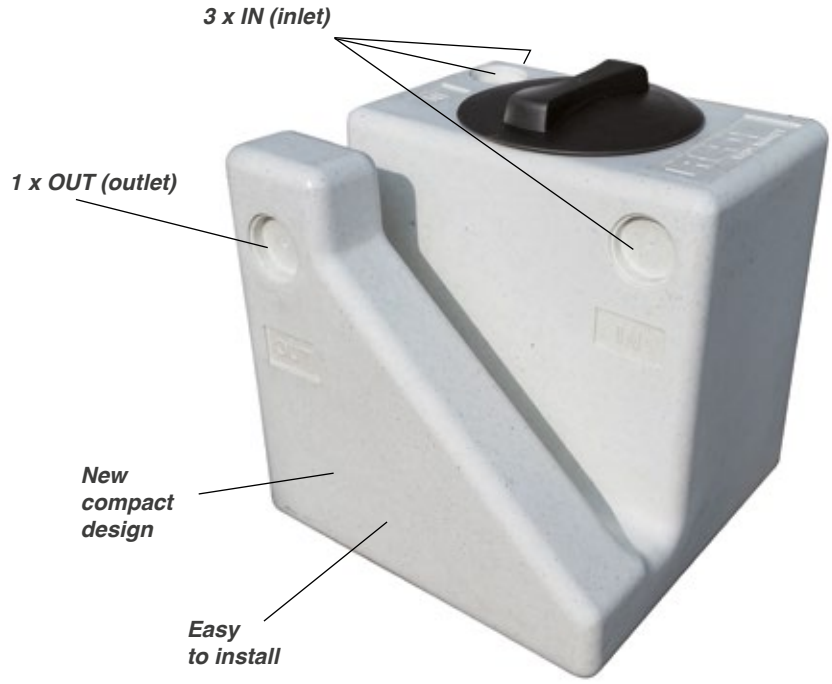

Easy cleaning access




Provided with a set of seals for multiple diameter connections:
Ø 1"1/4 (32mm)
Ø 1"1/2 (40mm)
Ø 2" (50mm).

REDI
40069 Zola Predosa, via Madonna dei Prati 5/A (Bo-Italy) **salesredi@aliaxis.com**
www.redi.it

Technical features


Grease trap family 50


Pre-treatment solutions

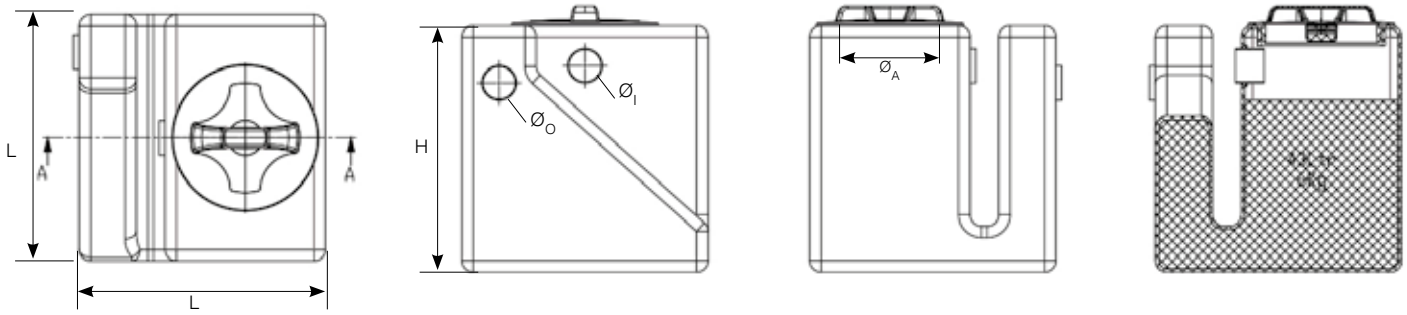

Item	Code	Size	Capacity	LxL	H	Ø$_I$ - Ø$_O$	Ø$_A$
		(l/s)	(l)	(cm)	(cm)	(mm)	(cm)
DEG.FAMILY 50	IS00510	0,1	48	43x43	43	40/50	16,5

How to install example

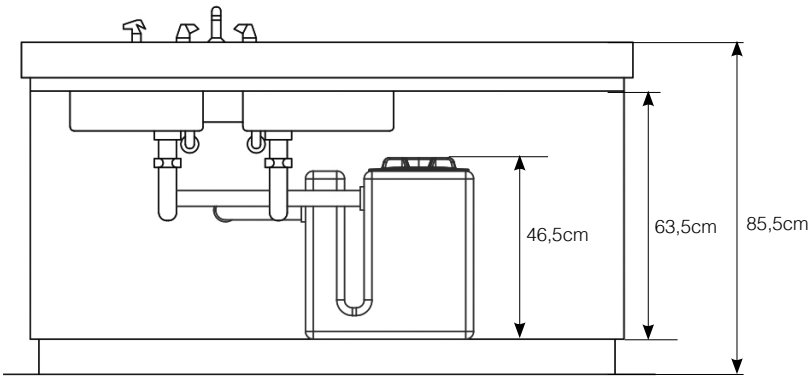

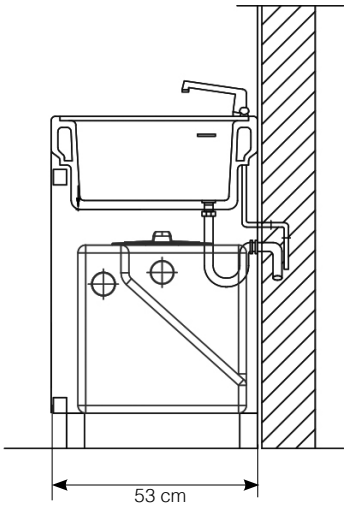

Product Description

Grease Trap in polyethylene, single-block, to be installed in tight spaces, e.g. under the sink, to limit the polluting load to be wasted in a public sewer or in absence of a public sewer, to be wasted in a private treatment plant.
Designed to obtain an efficient grease separation and a good hydraulic flow, it is suitable to be used when it's not possible to install a standard grease trap underground.

The Grease Trap is equipped with a threaded cover for full inspection and easy removal of grease and other floating materials.
The product is completely manufactured in recyclable materials.

REDI
40069 Zola Predosa, via Madonna dei Prati 5/A (Bo-Italy) **salesredi@aliaxis.com**
www.redi.it